

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

## Two Zone Back Bar Coolers Two, Three, and Four Door, Self-Contained



BB60BR-L1-XS(LR)



NSF standard 7 listed for storage of non-hazardous bottled and canned products only



**Intertek**  
Conforms to ANSI/UL STD 471  
Certified to CSA STD C22.2 No. 120

**BB - - - ( )**

**Size:**  
60 = 60" Two Door  
84 = 84" Three Door  
108 = 108" Four Door

**Configuration:**  
BW = Beer / White Wine  
BR = Beer / Red Wine  
WR = White / Red Wine

**Refrig. Compartment:**  
L = Left or R = Right

**Base Height:**  
1 = 1"  
6 = 6" Legs

**Door Hinge Location:**  
(from left to right)  
L = Left or R = Right

**Top Style:**  
N = No finished top  
L = Laminated  
S = Stainless

**Door Style:**  
B = Black vinyl clad  
U = Unlaminated  
L = Laminated  
S = Stainless  
G = Glass  
X = Stainless Glass  
Y = Laminated Glass

### Standard Features

- Available in three configurations: beer and white wine, beer and red wine, or white wine and red wine
- Available with compressor located left or right. The warmer of the two compartments is always a single door and located opposite the compressor end.
- The two temperature zones are independently controlled
- Self-contained
- All stainless steel interior construction with radius interior corners for easy cleaning
- CFC free foamed-in-place insulation
- Black vinyl-clad steel exterior front and sides
- Automatic defrost timer
- Automatic condensate evaporator
- Leg sockets recessed into base
- 1/2" thick ABS plastic threshold scuff plate
- 180° swinging doors

### Specifications

#### Electrical

- 120V, 1 phase, 60 Hz, 6.5 full load amps
- Dedicated 15 amp circuit is required
- Includes a 6 foot grounded cord and plug which exits the back of refrigeration compartment

#### Refrigeration

- R134a
- 1/3 HP

#### Operating Range

- Beer compartment: 34°F (1°C) to 40°F (4°C)
- White wine compartment: 50°F (10°C) to 55°F (13°C)
- Red wine compartment: 60°F (16°C) to 65°F (18°C)

#### Plumbing

- Automatic condensate evaporator. No drain connection required

#### Shelving

- Two adjustable coated shelves and one bottom coated rack per door included
- Part #06006264 wine rack shelf with 7 slots is available as an accessory

#### Legs

- 1-5/8" diameter
- Stainless steel bullet feet

#### Capacity

- 7 cases long neck beer bottles per door or 66 750ml wine bottles per door

#### Materials

- 22 gauge stainless steel parts include: interior floor, walls, ceiling, front of cabinet, and evaporator housing
- 22 gauge black vinyl-clad parts include: sides, standard doors, and compressor compartment housing
- 22 gauge galvanized steel parts include: exterior sub-top and back
- 16 gauge stainless steel parts include: legs
- 16 gauge galvanized steel parts include: base and compressor compartment base plate
- 16 gauge zinc plated CR steel parts include: leg sockets
- 12 gauge stainless steel parts include: hinges, hinge brackets, and lock brackets

**Glastender, Inc.** • 5400 N Michigan Rd • Saginaw, MI • 48604-9780  
989.752.4275 • 800.748.0423 • Fax 989.752.4444  
www.glastender.com


Approval/Notes:

Specifications subject to change without notice. For current specifications please visit our website.


# Self-Contained Two Zone Back Bar Coolers

## Dimensional Information

### BB60BW, BB60BR, and BB60WR

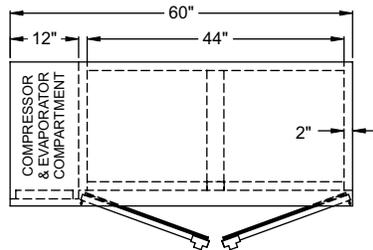


Plan View

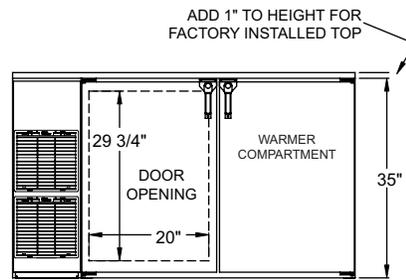


Front Elevation

### BB84BW, BB84BR, and BB84WR

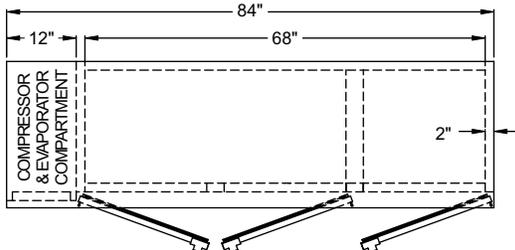


Plan View

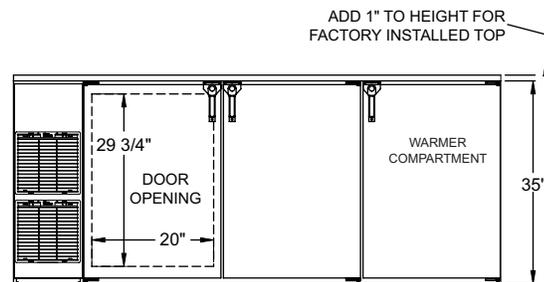


Front Elevation

### BB108BW, BB108BR, and BB108WR

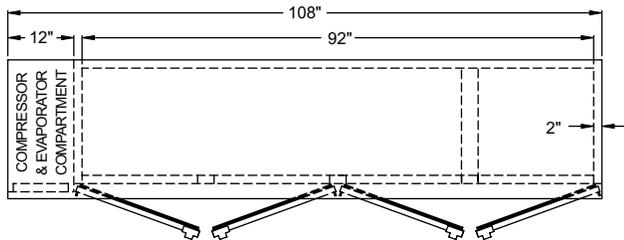


Plan View

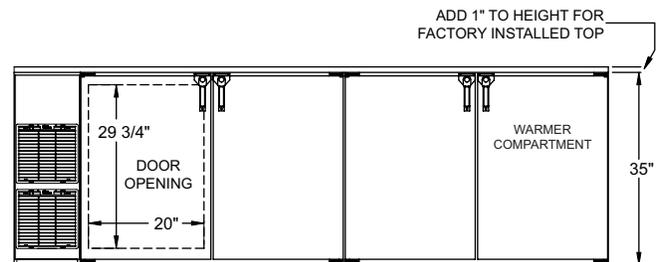

Front Elevation

## Side View All Models

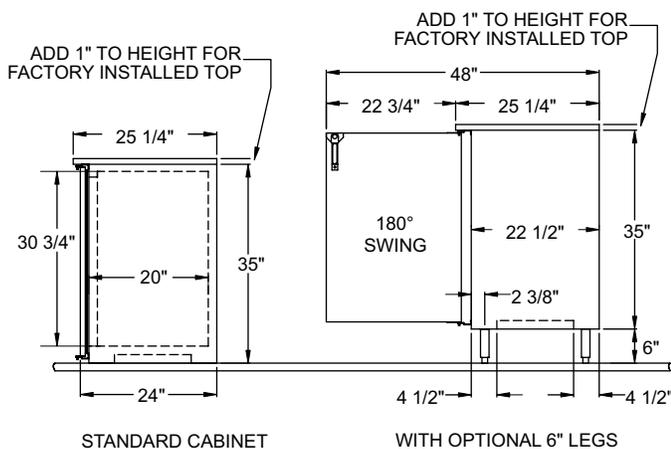

06006264 Accessory Wine Rack Shelf for BB, stainless steel with slots for 7 bottles