

Item #	
Project	
Date	

# Tamper Resistant Coffee Urn - Twin 10 gallon

## High Capacity: Two Independent Brewing Systems High Security: No Exposed Fasteners

Model 67710 Electric



### Features:

• Will Exceed High Volume Demand Burst, Two Independent Brewing Systems

Two independent brewing heads brew into the 10 gallon (38L) liners simultaneously or independently. Brew heads are mounted under hinged lockable covers.

- Innovative Indicators Eliminate Exterior Parts Indicator lights replace gauge glasses. Water hot light replaces thermometer. Completely internal air agitation system for each liner.
- **Designed For Safety** Eliminates potential burn hazard with two layers of high density fiberglass insulated body.
- Flanged Feet


Urn can be fastened to counter top to prevent tipping or movement

#### • Tamper Resistant

All adjustable controls (timer, thermostats, sprayover flow control), are inside a lockable control box. Master on/off switch is behind a stainless steel, lockable panel. Control switches and pilot lights are protected behind a tamper resistant, one inch thick Lexan® cover plate.

- Longer Average Life Internal frame is all A.I.S.I. type 304, 18-8 stainless steel.
- Saves Steps In Brewing Two permanent stainless steel brew baskets, so filter paper is eliminated.

## **Coffee Urn - Tamper Resistant** High Security / High Capacity Coffee Brewing Equipment

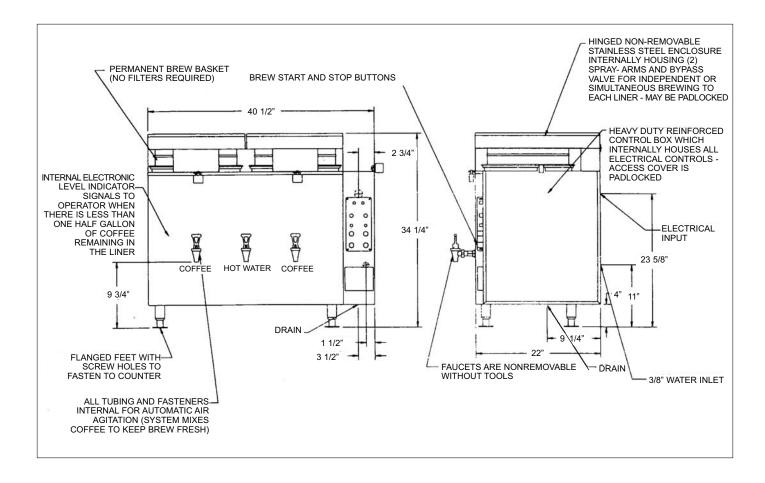

		67710			
Productivity, 50°F Inlet		40 gal. per hour			
Productivity, 130°F Inlet		80 gal. per hour			
Dimensions	40-1/2" W X	40-1/2" W X 22" D X 34-1/4" H, (51" H With Cover Open)			
Electrical Options	120/240V	1 Phase	3 Wire	63 Amps	
all models 15 KW	120/208V	1 Phase	3 Wire	72 Amps	
	240V	3 Phase	3 Wire	36 Amps	
	120/208V	3 Phase	4 Wire	42 Amps	
	480V	3 Phase	3 Wire	18 Amps	





CORPORATION

Grindmaster® Coffee Grinders and Brewers • PrecisionBrew™ Brewing Systems • Espressimo® Espresso Machines Crathco® Hot Beverage Dispensers • Crathco® Cold and Frozen Beverage Dispensers • AMW Coffee and Tea Systems Tel (502) 425-4776 • Fax (502) 425-4664 • 1-800-695-4500 (USA & Canada only) P.O. Box 35020 • Louisville, KY 40232 • USA

www.grindmaster.com • email: info@grindmaster.com