



## GLO-RAY® NARROW INFRARED FOODWARMERS

Models GRN-18, -24, -30, -36, -42, -48, -54, -60, -66, -72  
GRNH-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

Hatco Glo-Ray® Narrow Infrared Foodwarmers keep all hot foods at optimum serving temperatures longer. Foods do not dry out or become discolored; even the most delicate dishes hold that "just-prepared" look. The Glo-Ray pre-focused heat pattern directs heat from a tubular element to bathe the entire holding surface.

### FLEXIBILITY

The continuous housings, up to 6' (1829 mm) in width, are available in seven powdercoated colors and brushed stainless steel to match any décor. The high watt and standard watt models come with non-adjustable 1.5" (38 mm) angle brackets. Accessorize units with non-adjustable tubular stands in decorative colors.

The slim line strip heaters are only 2" (51 mm) high and 4" (102 mm) deep, ideal for minimal sight obstruction of food product in heated buffet areas.


Remote control enclosures are available in several sizes, built in accordance with UL Standards to accommodate switches, indicator lights and wiring, ready for installation.

An on-off switch and indicator light may be installed in front or back of the unit to suit the location.

### QUALITY

The following features assure the finest performance for years to come:

- The slim design with 2" (51 mm) height and 4" (102 mm) depth keep the focus on the food in buffet lines.
- Available in widths from 18" to 6' (457-1829 mm).
- Available in heavy duty stainless steel housings.
- Sturdy continuous painted steel housings available in *Designer* colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper
- Pre-focused heat maintains serving temperatures longer without continuing to cook the food.
- Variety of models, configurations, colors and accessories provide unlimited design

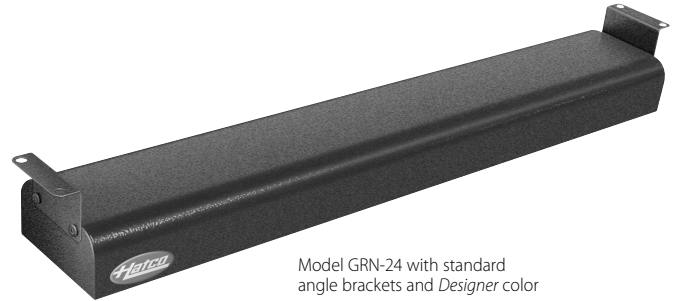

Model GRN-24 with standard angle brackets and *Designer* color

### Remote Control Enclosures



Model RMB-3F with toggle switch and indicator light



Model RMB-3D with toggle switch




HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.  
(800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976  
www.hatcocorp.com • E-mail: equipsales@hatcocorp.com

METAL SHEATHED ELEMENTS GUARANTEED AGAINST BURNOUT AND BREAKAGE FOR TWO YEARS.



# GLO-RAY® NARROW INFRARED FOODWARMERS

Models GRN-18, -24, -30, -36, -42, -48, -54, -60, -66, -72  
GRNH-18, -24, -30, -36, -42, -48, -54, -60, -66, -72



## SPECIFICATIONS

High Watt		Standard Watt			
Model	Watt	Model	Watt	Width	Shipping Weight*
GRNH-18	350	GRN-18	250	18" ( 457 mm)	6 lbs. (3 kg)
GRNH-24	500	GRN-24	350	24" ( 610 mm)	7 lbs. (3 kg)
GRNH-30	660	GRN-30	450	30" ( 762 mm)	8 lbs. (4 kg)
GRNH-36	800	GRN-36	575	36" ( 914 mm)	9 lbs. (4 kg)
GRNH-42	950	GRN-42	675	42" (1067 mm)	10 lbs. (5 kg)
GRNH-48	1100	GRN-48	800	48" (1219 mm)	11 lbs. (5 kg)
GRNH-54	1250	GRN-54	925	54" (1372 mm)	13 lbs. (6 kg)
GRNH-60	1400	GRN-60	1050	60" (1524 mm)	14 lbs. (6 kg)
GRNH-66*	1560	GRN-66	1160	66" (1676 mm)	16 lbs. (7 kg)
GRNH-72*	1725	GRN-72	1275	72" (1829 mm)	17 lbs. (8 kg)

\* 120 volt models not available for use with remote infinite switch.

\* Does not include RMB.

## DIMENSIONS

18" to 72"W x 4"D x 2"H (457-1829 x 102 x 51 mm).

## VOLTAGE

120, 208 and 240 volts, single phase.

## REMOTE CONTROL ENCLOSURES

Model	Volts	Width	Switches
RMB-3A	120	5.5" (140 mm)	1 Infinite
RMB-3B	208	5.5" (140 mm)	1 Infinite
RMB-3C	240	5.5" (140 mm)	1 Infinite
RMB-3D	120, 208, 240	5.5" (140 mm)	1 Toggle
RMB-3F	120	5.5" (140 mm)	1 Toggle 1 Indicator Light
RMB-3G	208	5.5" (140 mm)	1 Toggle 1 Indicator Light
RMB-3H	240	5.5" (140 mm)	1 Toggle 1 Indicator Light
RMB-7F	120	9" (229 mm)	1 Infinite 1 Indicator Light
RMB-7G	208	9" (229 mm)	1 Infinite 1 Indicator Light
RMB-7H	240	9" (229 mm)	1 Infinite 1 Indicator Light

## ONE CONTROL BOX PER FOODWARMER.

GLO-RAY WARMERS SHOULD BE POSITIONED 8-11" (203-279 mm) standard wattage, and 11-14" (279-356 mm) high wattage, ABOVE A NON-METALLIC SURFACE.

Minimum space to a NON-FLAMMABLE counter is 7" (178 mm).

Minimum space to a FLAMMABLE counter is 11" (279 mm).

With the proper distance maintained between Glo-Ray and the food, hot foods will be held at ideal serving temperatures without cooking the foods beyond the point of excellence.

## OPTIONS (NOT FOR RETROFIT)

- Designer Colors, Painted Metal Models 18" to 72" (457-1829 mm): Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, and Antique Copper
- All Stainless Steel Exterior
- Remote Control Enclosure in Designer Colors

- Extended Electrical Leads

## ACCESSORIES

- Non-Adjustable Tubular Stands 10", 12", 14" or 16" (254, 305, 356 or 406 mm) – Available in Designer colors or Unpainted

## PRODUCT SPECS Infrared Foodwarmer

The Narrow Infrared Foodwarmer shall be a Glo-Ray®, manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

With 24/7 service (U.S. and Canada only), the Foodwarmer shall be a Glo-Ray Model ..., rated at ... watts, ... volts, single phase and be ... inches (millimeters) in overall width.

The Glo-Ray shall consist of painted steel housing and include as standard equipment non-adjustable 1.5" (38 mm) angle brackets and

an on-off switch and indicator light may be optionally installed to either the front or rear of the unit.

The infrared heating element shall be tubular metal sheathed. The foodwarmer shall be factory assembled ready for electrical installation.

Options and accessories shall include choice of Designer color, stainless steel exterior, extended electrical leads, remote control box, and non-adjustable tubular stands.