

REFRIGERATION SELF-CONTAINED BACK BAR COOLERS

MODEL: _

PROJECT:

ITEM #:

QTY:

PRODUCT IMAGE



BS84L-KSS-LRR shown with optional 1" Top and Glass Door Upgrade **AVAILABLE IN 36", 60", 84", & 108" SIZES**

OPTIONAL ACCESSORIES

 DC 100	Four C" Ctoiplose Ctool Long
BS-100	Four 6" Stainless Steel Legs
BS-101	Six 6" Stainless Steel Legs
BS-102	Four 4" Stainless Steel Legs
BS-103	Six 4" Stainless Steel Legs
BS-106	Left Side Stainless Steel Kick Plate
BS-107	Right Side Stainless Steel Kick Plate
BS-108	Four 3" Casters with brakes
BS-109	Six 3" Casters with brakes
BS-136	36" Stainless Steel Front Kick Plate
BS-160	60" Stainless Steel Front Kick Plate
BS-184	84" Stainless Steel Front Kick Plate
BS-199	108" Stainless Steel Front Kick Plate
BC-734	Replacement LED Light for BS36

- BC-734 Replacement LED Light for BS36
 BC-735 Replacement LED Light for BS60
- BC-735 Replacement LED Light for BS60
 BC-736 Replacement LED Light for BS84
- **BC-737** Replacement LED Light for BS108



APPROVED BY:

Printed in the USA

Due to our commitment to continued product improvement, specifications are subject to change without notice.

Krowne Metal Corporation

100 Haul Rd. Wayne, NJ 07470 • Toll Free: (800) 631-0442 • Fax: (973) 872-1129 sales@krowne.com • www.krowne.com • www.facebook.com/KrowneMetal • www.twitter.com/KrowneMetal

STANDARD FEATURES

Electrical

115 V, 1 Phase, 60 Hz. Furnished with 8'-0" plug-in cord, which exits left rear of cooler. NEMA 5-15P Plug Configuration. Dedicated 15 Amp circuit recommended
1 Door Model: 3.6 Full Load Amps, 1/5 HP
2 Door Model: 6.0 Full Load Amps, 1/4 HP
3 Door Model: 9.0 Full Load Amps, 1/3 HP
4 Door Model: 7.0 Full Load Amps, 1/3 HP
Refrigeration

Self-contained 134A Refrigerant. 30°F-40°F operating range Digital Thermostat on front grille

36"	60 "	84"	108"
7	12	24	30
10	20	34	40
72	106	170	300
	7 10	7 12 10 20	7 12 24 10 20 34

Interior

20 gauge stainless steel with coved corners. Two adjustable epoxy coated wire shelves with floor rack per door. Door Opening: 29 $^{11}/_{16}$ " high x 19 $^{15}/_{16}$ " wide

Exterior

Sides: 20 gauge stainless steel or black vinyl Front: 20 gauge stainless steel, black vinyl or glass Back: 20 gauge galvanized steel Top: 20 gauge galvanized steel with option of stainless steel

Insulation

2" thick foamed-in-place polyurethane

Plumbing


No drain connection required. Condensate evaporator pan included

IMPORTANT NOTE: DO NOT PLUG INTO GFI OUTLET

* This equipment is intended for the storage and display of non-potentially-hazardous bottle or canned products only *



REFRIGERATION SELF-CONTAINED BACK BAR COOLERS

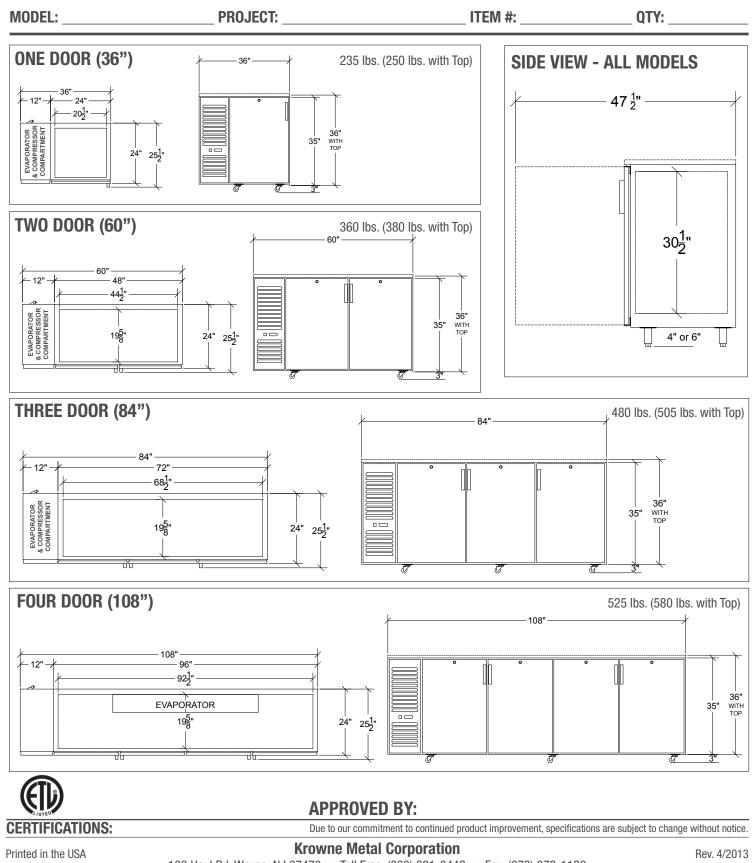

100 Haul Rd. Wayne, NJ 07470 • Toll Free: (800) 631-0442 • Fax: (973) 872-1129 sales@krowne.com • www.krowne.com • www.facebook.com/KrowneMetal • www.twitter.com/KrowneMetal No. 1.3