

NOR-LAKE, INCORPORATED
727 Second Street
P.O. Box 248
Hudson, Wisconsin 54016

800-955-5253
715-386-2323
866-961-5253 Parts
800-388-5253 Service
715-386-6149 FAX
www.norlake.com



BOTTOM MOUNTED ICE CREAM HARDENING AND HOLDING CABINETS



NX201WWW/0 & NX201WWW/4

PROJECT:

ITEM NUMBER:

MODEL NUMBER:

SPECIFICATIONS FOR: NX201WWW/0, NX201WWW/4, NX362WWW/4

- **Finish:** 24 gauge painted textured galvanized steel interior and exterior.
- **Insulation:** 2" foamed in place "zero ODP" urethane insulation.
- **Hardware:** Standard electronic controller, digital thermometer, four heavy-duty white epoxy-coated shelves per section, self-closing doors, heavy-duty horizontal handle, anti-condensate door frame heater.
- **Electrical:** 115 volt, 60 Hz, 1 phase with cord and Nema 5-20P plug (NX201WWW/0). 230 volt, 60 Hz, 1 phase with cord and Nema 6-15P plug (NX201WWW/4 & NX362WWW/4).
- **Refrigeration:** Self-contained, bottom mounted, hermetic refrigeration system. R-404a refrigerant. Temperature range: 15°F to -20°F.
- **Approvals:** UL & C-UL listed, UL EPH classified

STANDARD FEATURES

- Audible and visible alarm
- Anti-condensate door frame heater
- Digital thermometer
- Four heavy-duty welded wire white epoxy-coated shelves per section
- Heavy-duty horizontal door handle
- 24 gauge painted textured galvanized steel interior and exterior
- Self-closing doors
- Temperature range: 15°F to -20°F
- UL & C-UL listed, UL EPH classified
- Warranties: 1 year parts and labor, 5 year compressor


OPTIONAL FEATURES

- Additional shelves
- Additional shelf clips
- Casters
- Custom exterior colors
- Legs
- Voltage boosting transformer




Nor-Lake, Inc.
Registered to ISO 9001:2008
File No. 10001816


HARDENING AND HOLDING CABINETS

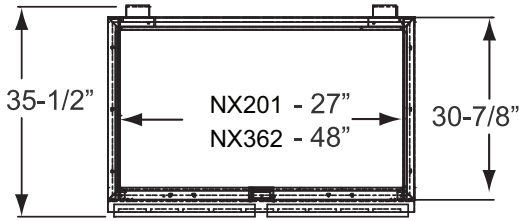

PLAN VIEW

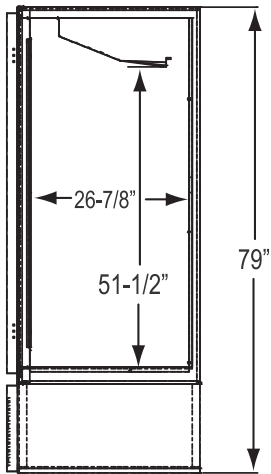

SIDE VIEW

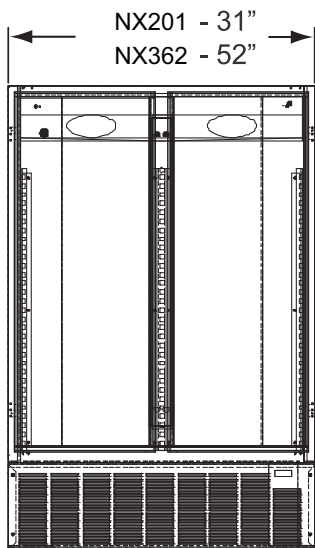

ELEVATION VIEW

SPECIFICATIONS

Model	NX201WWW/0	NX201WWW/4	NX362WWW/4
<i>Crated Weight (lbs.)</i>	630	630	880
<i>Interior Height</i>	51-1/2"	51-1/2"	51-1/2"
<i>Interior Width</i>	27"	27"	48"
<i>Interior Depth</i>	26-7/8"	26-7/8"	26-7/8"
<i>Overall Height</i>	79"	79"	79"
<i>Overall Width</i>	31"	31"	52"
<i>Overall Depth</i>	36-1/2"	36-1/2"	36-1/2"
<i>Gross Cubage (ft.³)</i>	20.5	20.5	36.5
<i>Number of Shelves</i>	4	4	8
<i>Condensing Unit Size</i>	3/4 HP	3/4 HP	2 HP
<i>Refrigerant</i>	R-404a	R-404a	R-404a
<i>Electrical Characteristics</i>	115/60/1	208-230/60/1	208-230/60/1
<i>Cord and Plug Furnished</i>	Yes	Yes	Yes
<i>Maximum Fuse Size</i>	20	15	15
<i>Nema Plug Configuration</i>	5-20P	6-15P	6-15P
<i>Total Amp Draw</i>	12.0	6.0	9.0

Specifications subject to change without notice.



Revision Date: 07/12
 © 2012 NOR-LAKE, INC.
 Printed in the U.S.A.
 Part Number: 151531

