

SUSHI CASES

REMOTE SUSHI DISPLAY CASES



TSSC-6

- Condensing Units Sold Separately

≡ FEATURES & BENEFITS ≡

- ALL MODELS SUPPLIED WITH REMOVABLE TEMPERED GLASS TOP, FRONT AND BACK-DOORS (ANSI STANDARD APPROVED)
- 304 STAINLESS STEEL FINISHED MIRROR
- NSF LISTED UNDER STANDARD NO.7
- ALL UNITS PREPPED AND READY FOR REMOTE REFRIGERATION HOOK-UP

INDOOR INSTALLATION *

| Sushi Case Model | # of Sushi Case Linked | Recommended HP | Overall Size (L x W x H) | Pipe Job | AMPS |
|-----------------------|------------------------|----------------|--------------------------|--------------------|------|
| TSSC-4 (4 ft.) | ONE | 1/4 | 19.4 x 13 x 9 | High 1/4 : Low 3/8 | 6.6 |
| | TWO | 1/3 | 17.4 x 14 x 10.9 | High 1/4 : Low 3/8 | 8.1 |
| | THREE | 1/2 | 20.6 x 13.9 x 13.2 | High 1/4 : Low 1/2 | 10.2 |
| TSSC-5 (5 ft.) | ONE | 1/4 | 19.4 x 13 x 9 | High 1/4 : Low 3/8 | 6.6 |
| | TWO | 1/2 | 20.6 x 13.9 x 13.2 | High 1/4 : Low 1/2 | 10.2 |
| | THREE | 3/4 | 24.3 x 18 x 14 | High 1/4 : Low 5/8 | 6.0 |
| TSSC-6 (6 ft.) | ONE | 1/4 | 19.4 x 13 x 9 | High 1/4 : Low 3/8 | 6.6 |
| | TWO | 1/2 | 20.6 x 13.9 x 13.2 | High 1/4 : Low 1/2 | 10.2 |
| | THREE | 3/4 | 24.5 x 28.3 x 17.9 | High 3/8 : Low 1/2 | 15 |

OUTDOOR INSTALLATION *

| Sushi Case Model | # of Sushi Case Linked | Recommended HP | Overall Size (L x W x H) | Pipe Job | AMPS |
|-----------------------|------------------------|----------------|--------------------------|--------------------|------|
| TSSC-4 (4 ft.) | ONE | 1/3 | 17.4 x 14 x 10.9 | High 1/4 : Low 3/8 | 8.1 |
| | TWO | 1/2 | 20.6 x 13.9 x 13.2 | High 1/4 : Low 1/2 | 10.2 |
| | THREE | 1/2 | 24.3 x 18 x 14 | High 1/4 : Low 1/2 | 6.0 |
| TSSC-5 (5 ft.) | ONE | 1/3 | 17.4 x 14 x 10.9 | High 1/4 : Low 3/8 | 8.1 |
| | TWO | 1/2 | 24.3 x 18 x 14 | High 1/4 : Low 1/2 | 6.0 |
| | THREE | 3/4 | 24.3 x 18 x 14 | High 1/4 : Low 5/8 | 8.0 |
| TSSC-6 (6 ft.) | ONE | 1/3 | 17.4 x 14 x 10.9 | High 1/4 : Low 3/8 | 8.1 |
| | TWO | 1/2 | 24.3 x 18 x 14 | High 1/4 : Low 1/2 | 6.0 |
| | THREE | 3/4 | 24.5 x 28.3 x 17.9 | High 3/8 : Low 1/2 | 15 |




* **TSSC-C4 (220V)**

* **TSSC-C1,2,3 (115V)**

* Please confirm at the time of the purchase.

Design and specifications subject to change without notice.
Actual shipping weight may differ due to extra packing materials for product protection.

| Model | Gauge | Crated Weight (lbs.) | L x D x H (inches) |
|--------|-------|----------------------|--------------------|
| TSSC-4 | 18 | 124 | 48 x 11 1/2 x 11 |
| TSSC-5 | 18 | 154 | 60 x 11 1/2 x 11 |
| TSSC-6 | 18 | 180 | 72 x 11 1/2 x 11 |

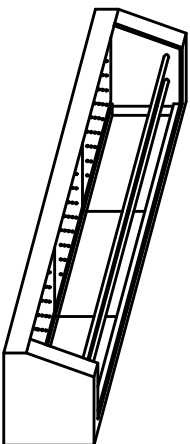

| Model Number | Width | Length | Height | Weight (lbs) | Surfing#/ 40"STD |
|--------------|-------|--------|--------|--------------|---------------------|
| TSSC-4' | 11 | 48 | 11 1/2 | 92.4 | 270 |
| TSSC-5' | 11 | 60 | 11 1/2 | 110 | 210 |
| TSSC-6' | 11 | 72 | 11 1/2 | 129.8 | 180 |

REFRIGERATOR MANUFACTURER
Turbo air

| DRAWING | MODEL | DATE | SCALE | NON-SCALE |
|------------|---------|------------------|---------|-------------|
| Sushi-Case | TSSC-6' | October 24, 2007 | DRAW UP | IL YOUNG AN |